


REPLACEMENT DRUMS

ORDER FORM

**4 Piece Drums
Direct Drive**

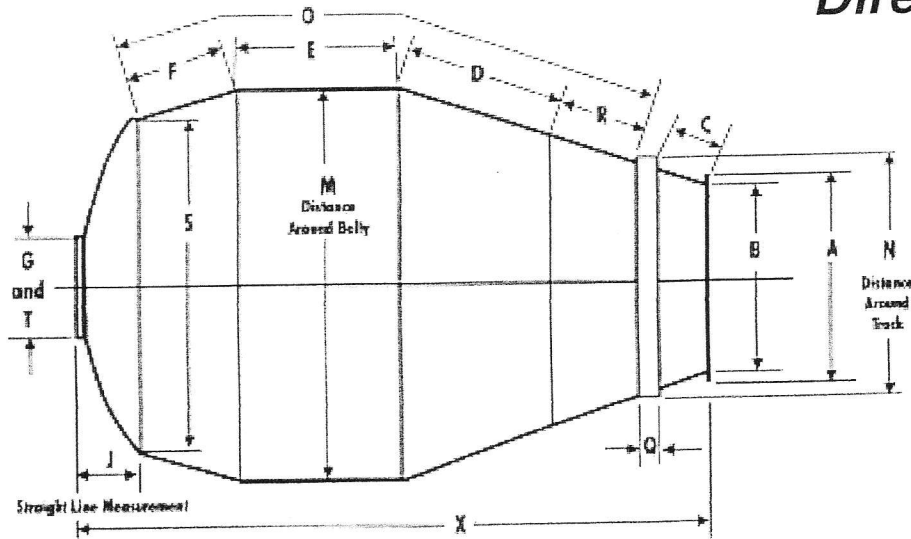

SPECIFY DRUM DIMENSIONS BELOW:


A.	<u>Drip Ring - O.D.</u>
B.	<u>Drip Ring - I.D.</u>
C.	<u>Drip Ring to Track</u>
D.	<u>3rd Section</u>
E.	<u>Belly Section</u>
F.	<u>1st Section</u>
G.	<u>Flange Diameter I.D.</u>
J.	<u>Flange To Head Weld</u>
M.	<u>Distance Around Drum</u>
N.	<u>Distance Around Track</u>
O.	<u>Race To Head</u>
Q.	<u>Roller Track Width</u>
R.	<u>4th Section</u>
S.	<u>Distance Around Drum Head</u>
T.	<u>#of Holes in Drive Flange</u>
X.	<u>Straight Line Distance</u>

Customer: _____
 Address _____
 City: _____
 State: _____ Zip _____
 Telephone # _____
 Truck # _____
 Make of Mixer this drum is for: *MTM
 Smith Rex Challenge Oshkosh CMC
 Jaeger Rocket- other: _____*
 Gearbox Type _____
 Drum Size : _____ Yards
 Thickness of Drum: 3/16 or 1/4"
 Thickness of Fins: 3/16 or 1/4"
 Bolt on Hatches: 1 or 2
 Quick Open Hatch: Yes or No
 Front Water (Thru Drum Head) Yes No
 Drip Edge: Square or Tapered

REPLACEMENT DRUMS

ORDER FORM

**3 Piece Drums
Direct Drive**

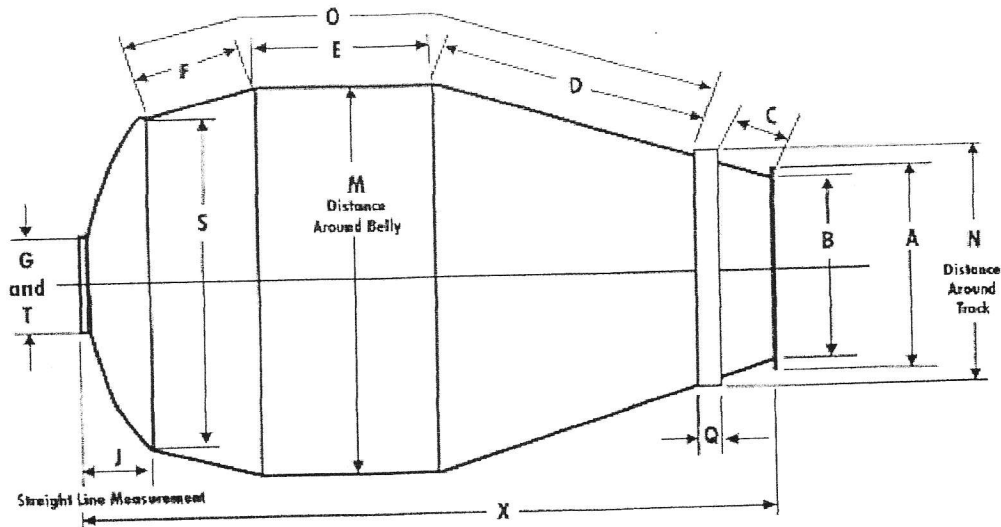

SPECIFY DRUM DIMENSIONS BELOW:

A.	<u>Drip Ring - O.D.</u>
B.	<u>Drip Ring - ID</u>
C.	<u>Drip Ring to Track</u>
D.	<u>3rd Section</u>
E.	<u>Belly Section</u>
F.	<u>1st Section</u>
G.	<u>Flange Diameter I.D.</u>
J.	<u>Flange To Head Weld</u>
M.	<u>Distance Around Drum</u>
N.	<u>Distance Around Track</u>
O.	<u>Race To Head</u>
Q.	<u>Roller Track Width</u>
S.	<u>Distance Around Drum Head</u>
T.	<u># of Holes in Drive Flange</u>
X.	<u>Straight Line Distance</u>

Customer: _____

Address _____

City: _____

State: _____ Zip _____

Telephone # _____

Truck # _____

Make of Mixer this drum is for: **MTM**

Smith Rex Challenge Oshkosh CMC

Jaeger Rocket- other: _____

Gearbox Type _____

Drum Size : _____ Yards

Thickness of Drum: 3/16 or 1/4"

Thickness of Fins: 3/16 or 1/4"

Bolt on Hatches: 1 or 2

Quick Open Hatch: Yes or No

Front Water (Thru Drum Head) Yes No

Drip Edge: Square or Tapered